


# Diesel Driven / Evaporator condenser integrated model



**For large-sized trucks**

## TNW6E

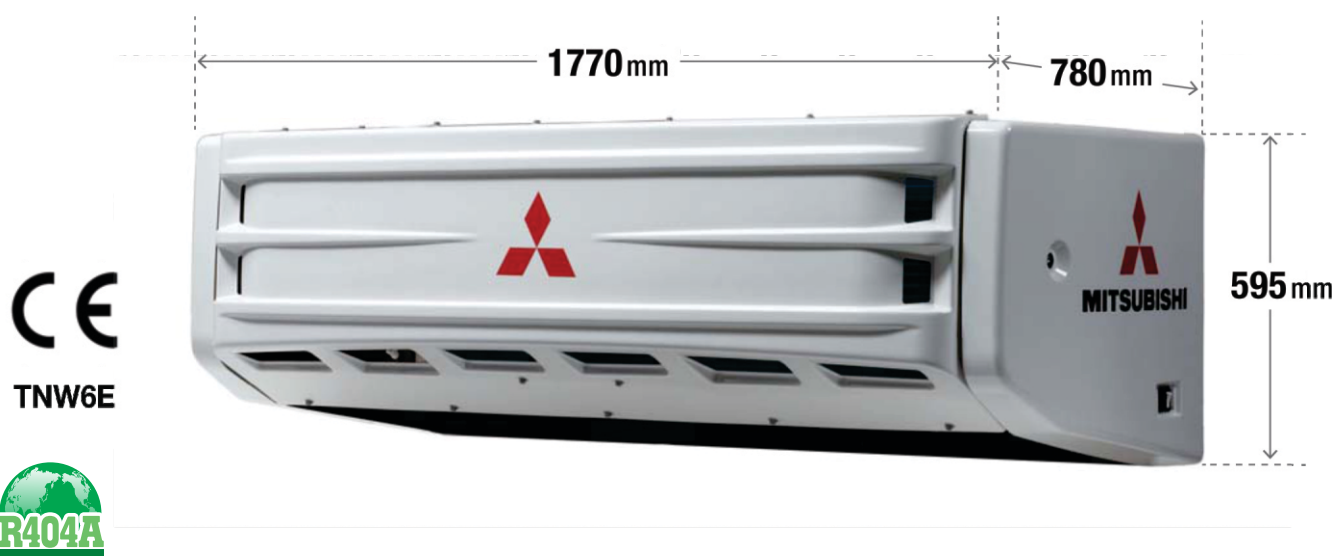

Diesel driven nose-mounted units with highly durable and reliable Mitsubishi Engines.








**For chilled & frozen**

### Refrigerating capacity

Temperature inside the cargo room  
(Ambient temperature 35°C)

**TNW6E**

**ATP** 0°C:7228w  
-20°C:4398w

Model	TNW6E	
Refrigerant		R404A
Capacity	 0°C	7228W [5254W]
	 -20°C	4398W [3201W]
Airflow volume		3000m³/h
Engine		L3E2-33NCC
Compressor		CR2318
Standby motor	kW	10.0kW
	voltage	380-400V
	phase	3Phase
	cycles	50Hz
Weight	 with standby, including accessory parts	515Kg

The figure within [ ] refers to the capability in the case of standby motor drive.  
ATP certified.